Environmental Atlas Berlin

Strategic Noise Map Industry and Commerce LN (noise index night)

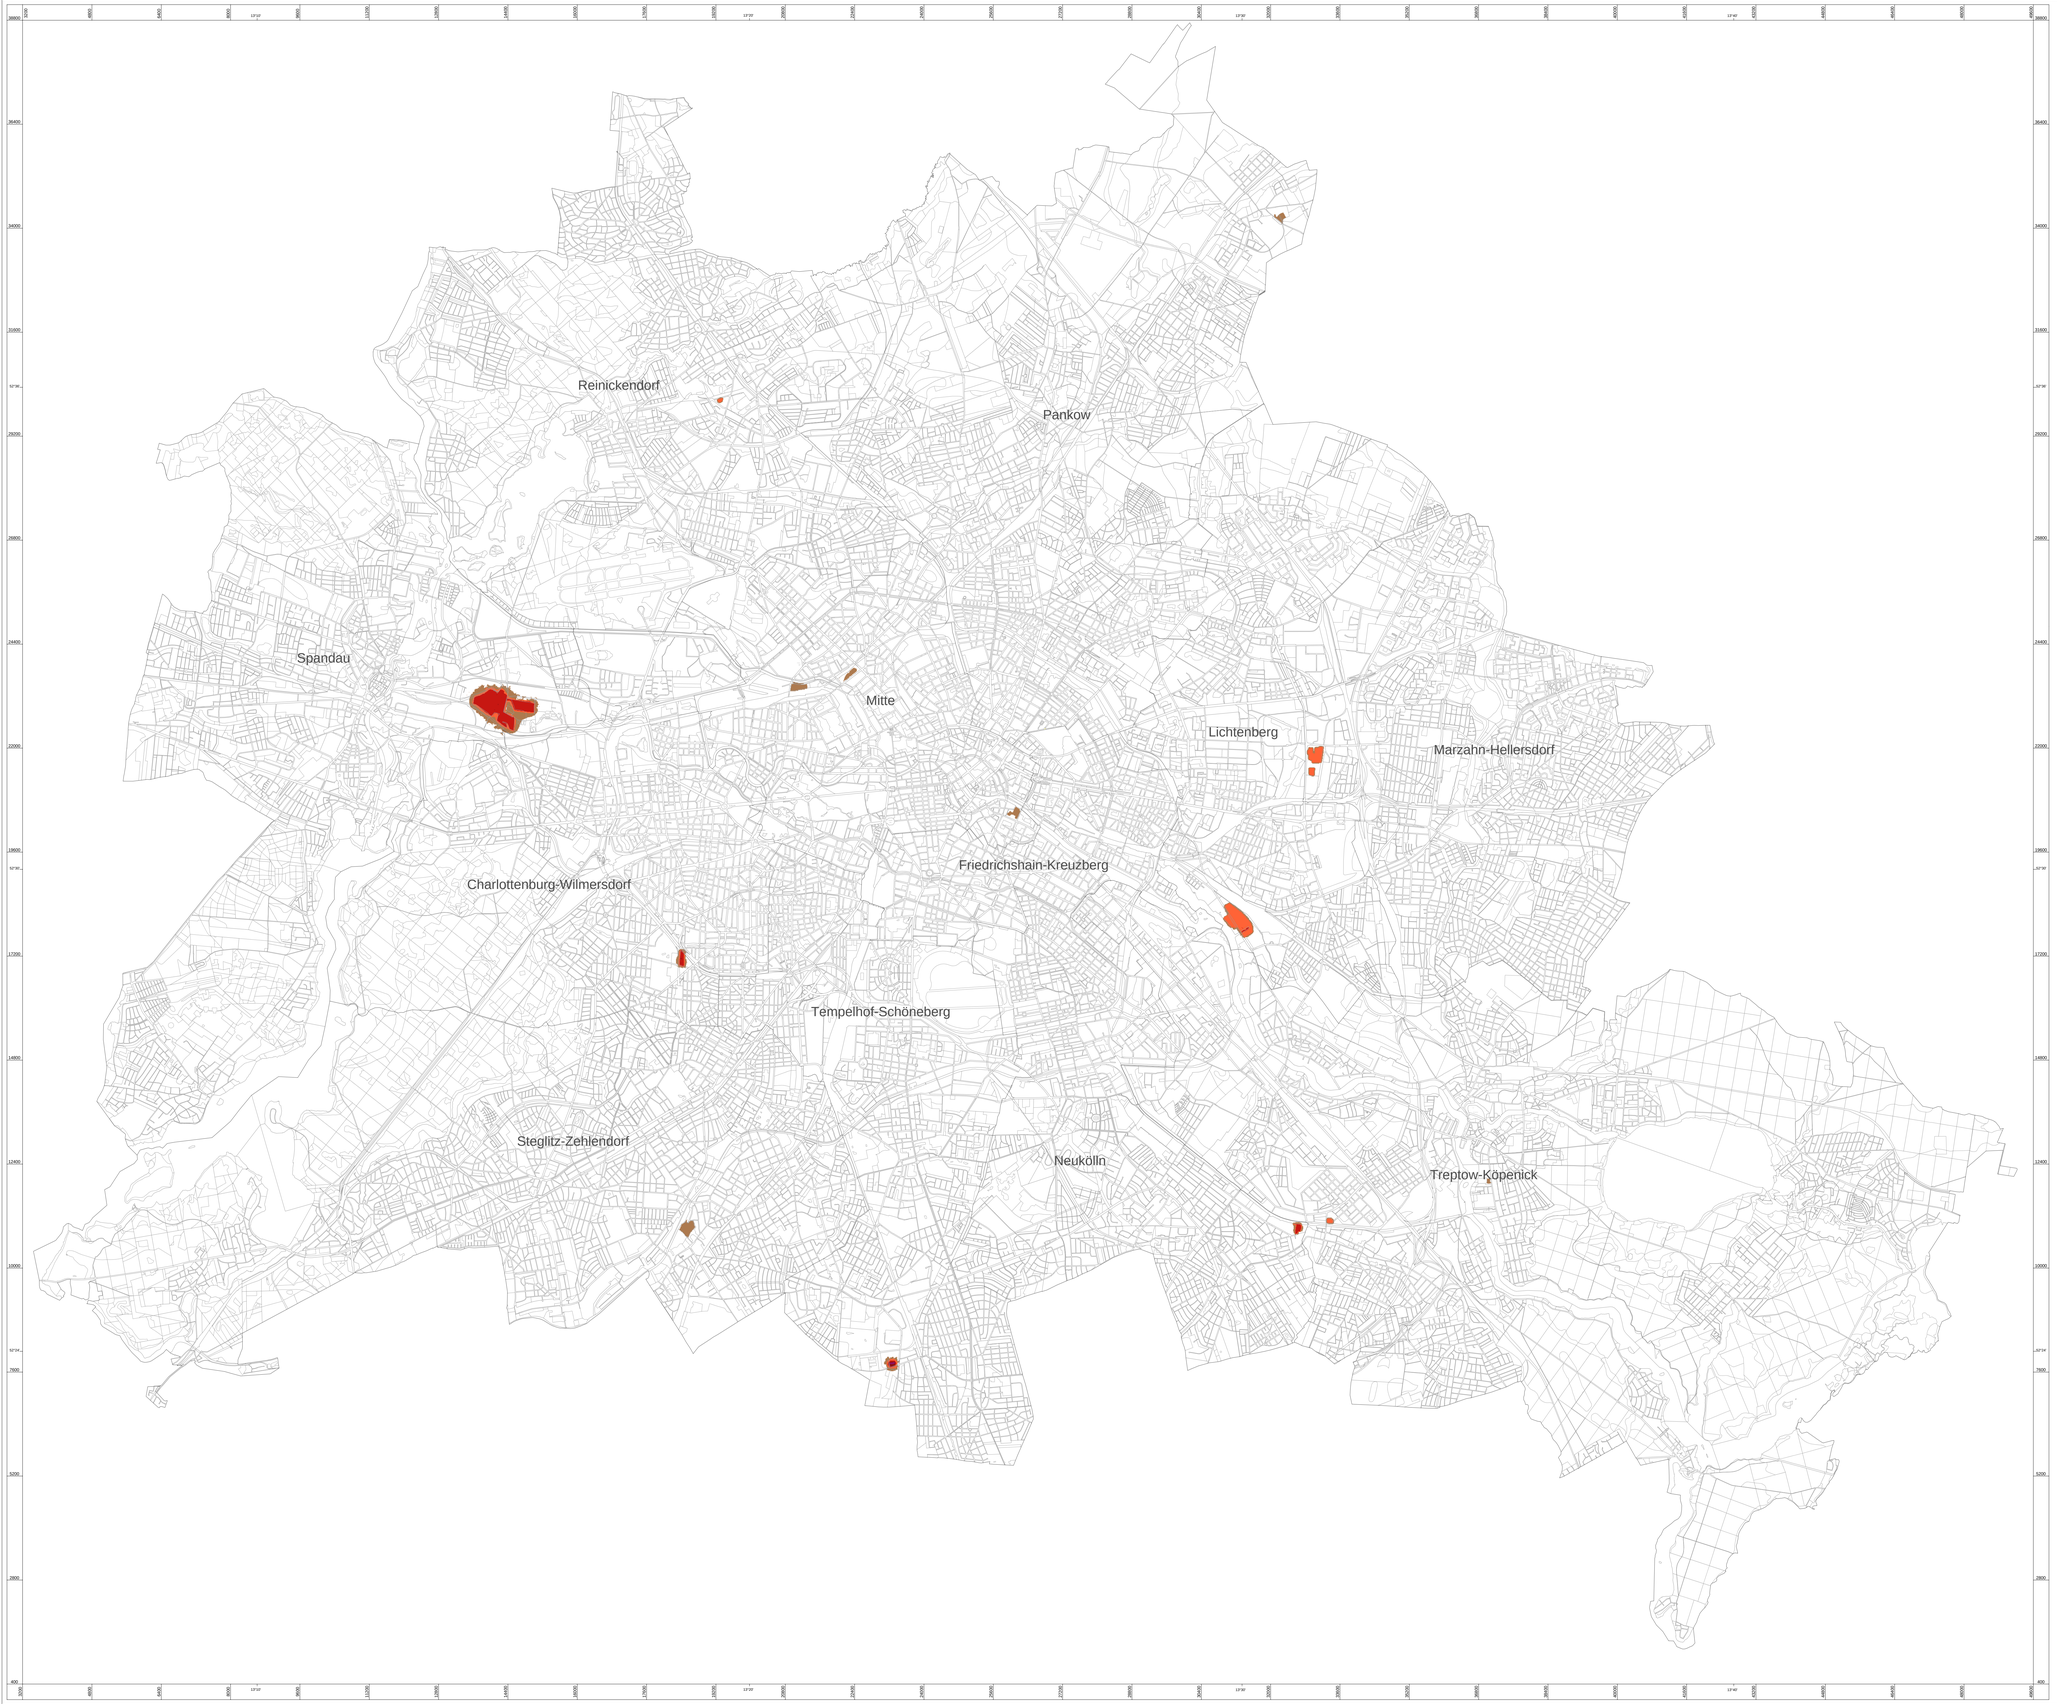

L_N in dB(A)

- < = 50
- > 50 - 55
- > 55 - 60
- > 60 - 65
- > 65 - 70
- > 70

1. The "Directive of the European Parliament and of the Council relating to the assessment and management of environmental noise" came into force on 18th February 2002.
This requires the following actions:
- determining the load caused by environmental noise by means of noise maps and according to assessment methods to be used by all of the Member States
- adoption of action plans through the Member States based on the results of noise maps and aiming at preventing and reducing environmental noise where necessary and particulary in cases where exposure levels might have effects that are detrimental to health.

2. The following noise sources were examined:
- Road traffic (motor vehicles including busses)
- Streetcar traffic and above-ground subway traffic
- Industrial and commercial areas with plants complying with Annex I of Directive 96/61/EC
- Air traffic (Tegel Airport)
- Railway traffic according to the Allgemeines Eisenbahngesetz (AEG, General Railroad Law).

Included in the examination were further relevant main noise sources in the Brandenburg area adjoining the borders, which exceed the specified immission levels (excluding Schönefeld Airport).

3. Noise maps must always be calculated. Calculations must comply with the preliminary EU-conforming calculation rules, which deviate from the Technical Codes that are binding according to national law in some aspects.
Noise maps are to be reviewed and, if necessary, revised every five years after they have been drawn up.

4. As required in the "Directive on the Assessment and Management of Environmental Noise", strategic noise maps graphically represent the noise situation in the following isophone classes:

Representation of isophone classes according to the requirements of 34th BImSchV	
	LNight > 50 dB(A) up to 55 dB(A)
LDEN > 55 dB(A) up to 60 dB(A)	LNight > 55 dB(A) up to 60 dB(A)
LDEN > 60 dB(A) up to 65 dB(A)	LNight > 60 dB(A) up to 65 dB(A)
LDEN > 65 dB(A) up to 70 dB(A)	LNight > 65 dB(A) up to 70 dB(A)
LDEN > 70 dB(A) up to 75 dB(A)	LNight > 70 dB(A)
LDEN > 75 dB(A)	

5. The noise exposure is specified through the following variables:
- Tabular data about the estimated number of persons living in areas located within the isophone bands. Figures should be rounded up or down to the next hundredth place.
- Tabular data about noise-exposed areas as well as the estimated number of dwellings, schools and hospitals in these areas for the following LDEN values: LDEN > 55 dB(A), LDEN > 65 dB(A), LDEN > 75 dB(A).

Scale: 1 : 50 000

0 0,5 1 1,5 2 2,5 3 3,5 4 4,5 5 km

Published by: **Senate Department for Urban Development in Berlin**

Unit Communication

Conception: III F 1. Informationssystem Stadt und Umwelt, Umweltatlas in Verbindung mit dem Referat Grundsatz- und Planungsangelegenheiten des Immissionsschutzes, Senatsverwaltung für Gesundheit, Umwelt und Verbraucherschutz

Text: III F 1, III D 13 SenGesUmV

Data: Lärmkartierung nach Umgebungslärmrichtlinie Ballungsraum Berlin, Arbeitsgemeinschaft Lärmkartierung Berlin GbR:
- Wölfel Beratende Ingenieure GmbH+Co. KG
- Lärmkontor GmbH
- CS Planungs- und Ingenieurgesellschaft mbH
- Wölfel MeßSysteme Software GmbH+Co. KG

Data Processing: - III F 1 unter Verwendung des Informationssystems Stadt und Umwelt (ISU) Berlin,
- Wölfel Beratende Ingenieure GmbH+Co. KG
- Monika Fastenmeier

Basis Map: - Digitale Arbeitskarte des ISU, 1 : 5.000 (ISU5), Stand 30.06.2007

Data from: September 2007

This map is copyright protected. Reprinting or any other form of reproduction only with prior permission.

Edition 2007

Internet Address: http://www.stadtentwicklung.berlin.de

07.0510